

# KAPPA—Center HCA



## SPECIFICATIONS

### ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- \* Nominal Impedance: 6 ohm
- \* Recommended Amp Power: 35–100W
- \* Frequency Response: 50 Hz – 27 kHz –
- \* Sensitivity: 90 dB /2,83V / 1 m
- \* Crossover frequency: 550 Hz & 2,5 kHz

### SYSTEM COMPONENTS:

- \* Cabinet: CKAPPA—Center HCA (Not for sale)
- \* Grille: GKAPPA—Center HCA (2400820)
- \* Midrange: G1304A 100mm midrange
- DC Resistance: 3,9 ohm
- \* Woofer: G1306B-H 2x170mm CMMD
- DC Resistance: 7,6 ohm

### SYSTEM COMPONENTS: (cont'd)

- \* Tweeter: A1201B—H 25mm  
Ceramic Dome Tweeter
- DC Resistance: 3,7 ohm
- \* Crossover Network: NKAPPA—Center HCA (2700822)  
NKAPPA—Center HCA (2700823)


### PHYSICAL SPECIFICATIONS:

- \* Enclosure Dimensions (H.W.D): 14,88x28,03x11,14 Inch. D
- 378x712x283mm D
- \* Shipping Weight: 38.6 lbs. (17.5 kg.)


### WARRANTY INFORMATION:

- \* Refer to the Warranty Statement packed with each product

## PACKAGE

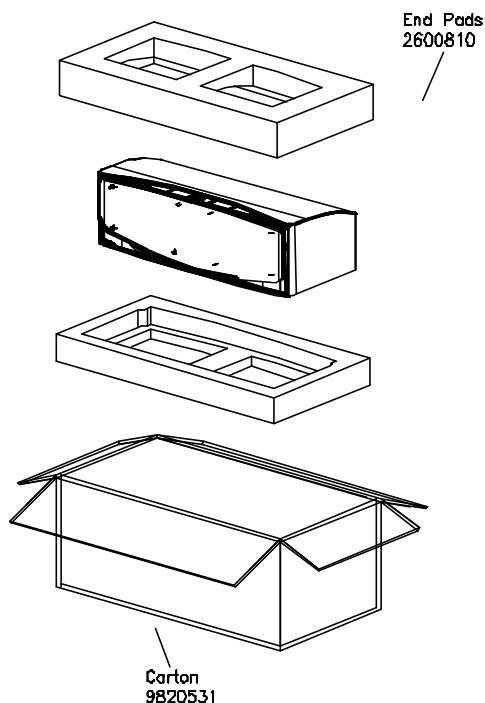

## SCHEMATIC

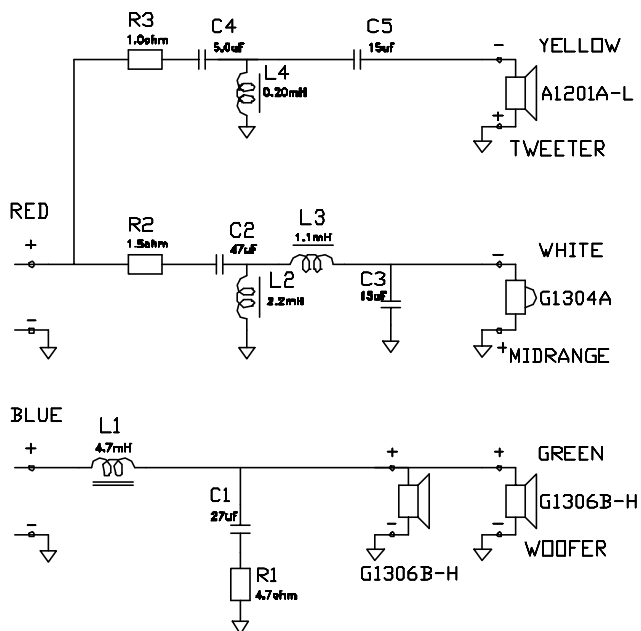


NOTE: CONE/DIAPHRAGM KIT NOT AVAILABLE.

DEFECTIVE DRIVER SHOULD BE REPLACED.

Valid after serial no. 01001  
Rev. 07.08.2002

KAPPA—Center HCA

## COMPONENT EXPLODED VIEW

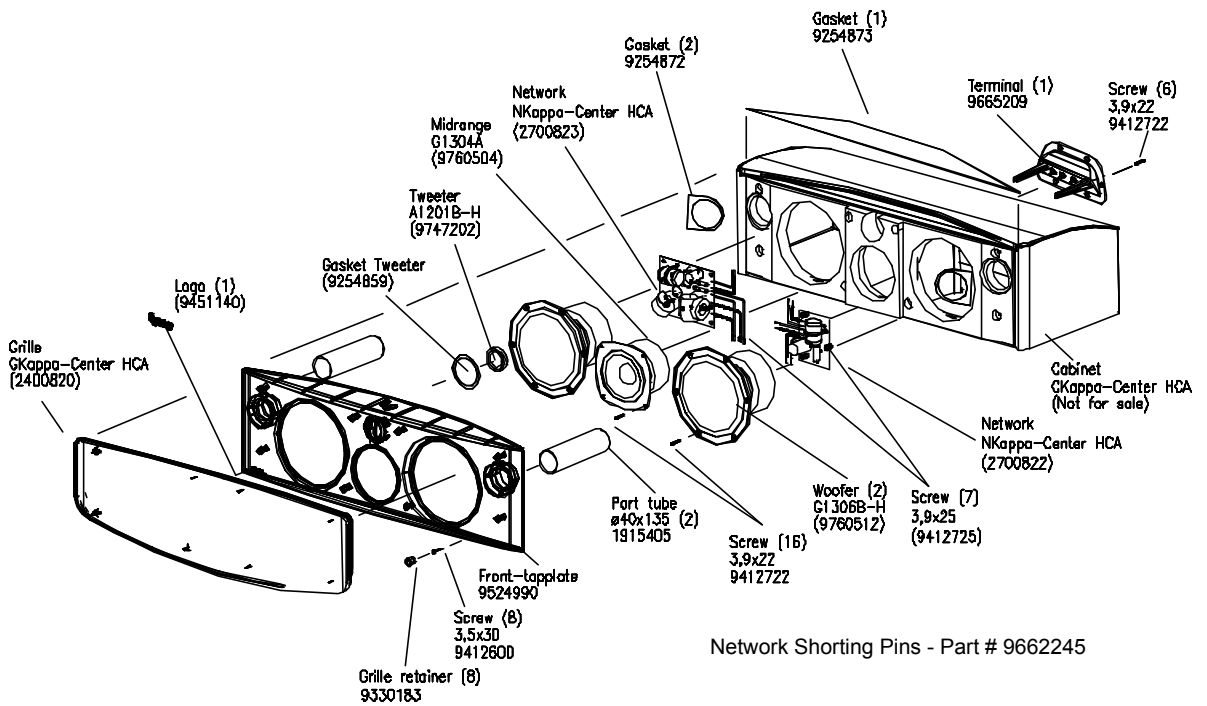

# KAPPA—Center HCA

## COMPONENT EXPLODED VIEW

